


Keypad Cabling

Location **2C-A**


v50

XL Keypad 2C-A/L

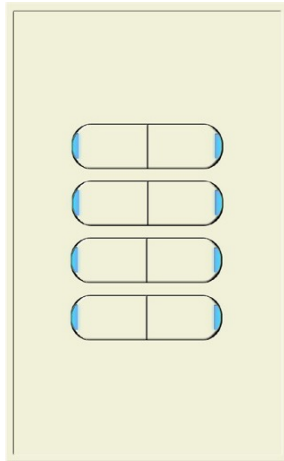

Left

XL Keypad 2C-A/R

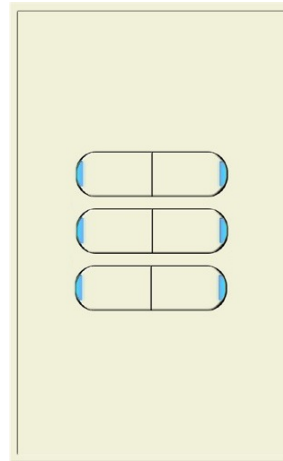

Right

Keypad Color
Light Almond

Cat 5 Cable Label	Wire Color	Wire Function	Keypad Terminal(s)	Keypad(s) & Connected Panel(s)			
1 2C-XA1	White/Brown	Common	L COM	<table border="1"> <tr> <td>XL Keypad 2C-A/L</td> </tr> <tr> <td>White/XL-Dim</td> </tr> </table>	XL Keypad 2C-A/L	White/XL-Dim	
	XL Keypad 2C-A/L						
	White/XL-Dim						
	Brown	Button L1	L 1				
	White/Green	Button L2	L 2				
	Green	Button L3	L 3				
	White/Orange	Button L4	L 4				
Orange	Button L5	L 5					
White/Blue	Button L6	L 6					
	Blue	Backlight	L B/L				
2 2C-XA2	White/Brown	Common	L COM	<table border="1"> <tr> <td>XL Keypad 2C-A/L</td> </tr> <tr> <td>XL Keypad 2C-A/R</td> </tr> <tr> <td>White/XL-Dim</td> </tr> </table>	XL Keypad 2C-A/L	XL Keypad 2C-A/R	White/XL-Dim
	XL Keypad 2C-A/L						
	XL Keypad 2C-A/R						
	White/XL-Dim						
	Brown	Button L7	L 7				
	White/Green	Button L8	L 8				
	Green	Button R1	R 1				
White/Orange	Button R2	R 2					
Orange	Button R3	R 3					
White/Blue	Button R4	R 5					
3 2C-XA3	White/Brown	Common	R COM	<table border="1"> <tr> <td>XL Keypad 2C-A/R</td> </tr> <tr> <td>White/XL-Dim</td> </tr> </table>	XL Keypad 2C-A/R	White/XL-Dim	
	XL Keypad 2C-A/R						
	White/XL-Dim						
	Brown	Button R5	R 6				
White/Green	Button R6	R 7					
Blue	Backlight	R B/L					