


# Keypad Cabling

Location **2F-C**

v50

XL Keypad 2F-C

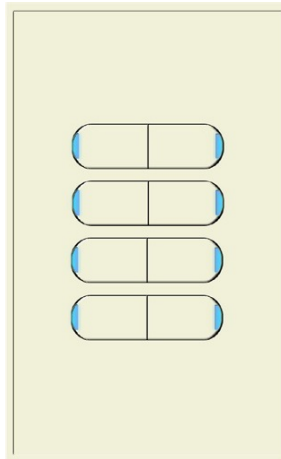

Keypad Color  
Light Almond

Cat 5 Cable Label	Wire Color	Wire Function	Keypad Terminal(s)	Keypad(s) & Connected Panel(s)		
1 <b>2F-XC1</b>	White/Brown	Common	COM	<table border="1"> <tr> <td>XL Keypad 2F-C</td> </tr> <tr> <td>Orange/XL-Dim/2</td> </tr> </table>	XL Keypad 2F-C	Orange/XL-Dim/2
	XL Keypad 2F-C					
	Orange/XL-Dim/2					
	Brown	Button 1	1			
	White/Green	Button 2	2			
	Green	Button 4	4			
	White/Orange	Button 5	5			
Orange	Button 6	6				
Blue	Backlight	B/L				
2 <b>2F-XC3</b>	White/Brown	Common	COM	<table border="1"> <tr> <td>XL Keypad 2F-C</td> </tr> <tr> <td>White/CN-Panel/7</td> </tr> </table>	XL Keypad 2F-C	White/CN-Panel/7
	XL Keypad 2F-C					
	White/CN-Panel/7					
	Brown	Button 3	3			
	White/Green	Button 7	7			
	Green	Button 8	8			
White/Orange	Button 7 @ 2G-A	Signal #1				
Orange	Button 8 @ 2G-A	Signal #2				
3 <b>2G-XA3</b>	White/Brown	Common	Return	<table border="1"> <tr> <td>XL Keypad 2G-A</td> </tr> <tr> <td>XL Keypad 2F-C</td> </tr> </table>	XL Keypad 2G-A	XL Keypad 2F-C
	XL Keypad 2G-A					
	XL Keypad 2F-C					
Brown	Button 7 @ 2G-A	Signal #1				
White/Green	Button 8 @ 2G-A	Signal #2				